




设计特性:

- 阀杆防爆出装置设计
- 钢球上有压力平衡孔
- 全通径
- 多种螺纹端供选择
- 铸件通过 TÜV AD 2000-Merkblatt WO 认证

标准规范:

- 设计标准 / Design: MSS SP-110
- 壁厚 / Wall Thickness: EN12516-3
- 管螺纹接端 / Pipe Thread KV-030: ASME B1.20.1, ISO 7/1
EN 10226, JIS B0203
ISO 228/1
- 对焊端 / Butt Weld KV-031: ASME B16.25 (øB2 Sch 40)
øB2 Available in Sch 10, 20
- 套焊端 / Socke Weld KV-032: ASME B16.11
- 检验与测试 / Inspection & Testing: MSS SP-110

序号	零件名称	材 质		
1	阀体	CF8M	CF8	WCB
2	阀盖 (螺纹)	CF8M	CF8	WCB
	阀盖 (焊接)	CF3M		
3	球体	CF8M	CF8	
4	阀座	PTFE / TFM1600		
5	阀杆	316	304	
6	阀盖垫圈	PTFE		
7	螺栓	A193-B8 / A2-70		
8	止推垫圈	PTFE		
9	挂锁装置	304		
10	手柄	304		
11	手柄胶套	PVC		
12	阀杆螺母	A194-8		
13	阀杆弹簧垫圈	304		
14	格南螺母	304		
15	V型阀杆填料	PTFE		
16	弹簧垫圈	304		
17	螺栓螺母	A194-8 / A2-70		

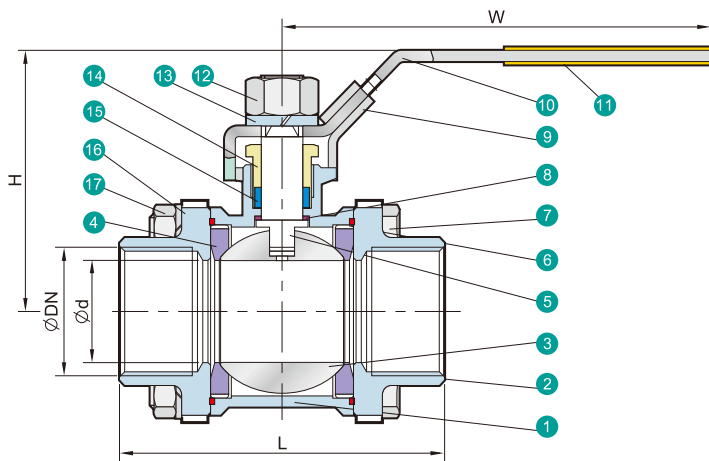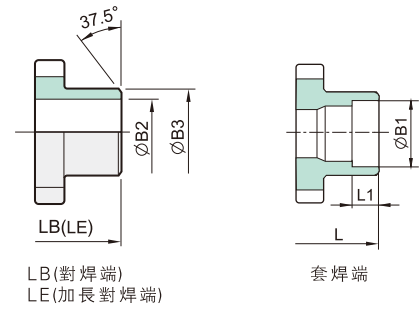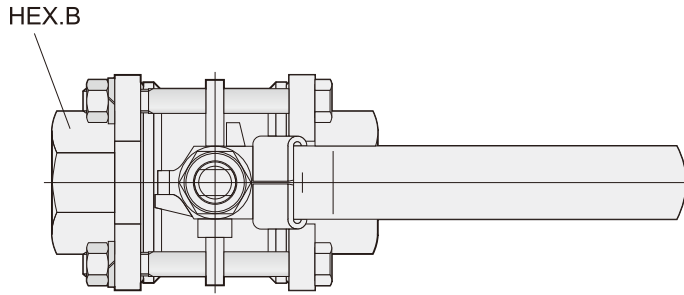

单位: mm

NPS	d	L	LB	LE	H	W	L1	B1	B2	B3	HEX.B	DN
1/4	10.6	65.2	65.2	225	57.5	100.0	10	14.2	9.3	18	23.5	NPT
3/8	12.7	65.2	65.2	225	57.5	100.0	10	17.5	12.5	18	23.5	
1/2	15.0	69.5	75.0	225	57.5	100.0	10	21.8	15.8	22	28.0	Rp
3/4	20.0	80.0	90.0	190	63.0	129.0	13	27.3	20.9	28	34.5	Rc
1	25.0	90.0	100.0	216	75.5	156.0	13	34.0	26.7	34	42.0	G
1¼	32.0	110.0	110.0	229	81.0	156.0	16	42.8	35.1	43	52.0	
1½	38.0	120.0	125.0	241	94.0	182.5	16	49.0	40.9	50	58.5	etc.
2	50.0	140.0	150.0	292	104.5	182.5	17	61.4	52.5	61	71.5	
2½	63.5	185.0	190.0	330	131.0	252.0	17	74.0	62.7	76	86.5	
3	76.0	205.0	220.0	356	139.0	252.0	17	90.0	78.0	92	101.0	