


ASME CLASS 600/900 2-PC Body, Flanged Ends, Full Port

KV-M43, KV-M45 (-29 °C ~ 200 °C)
KV-M63, KV-M65 (-29 °C ~ 400 °C)

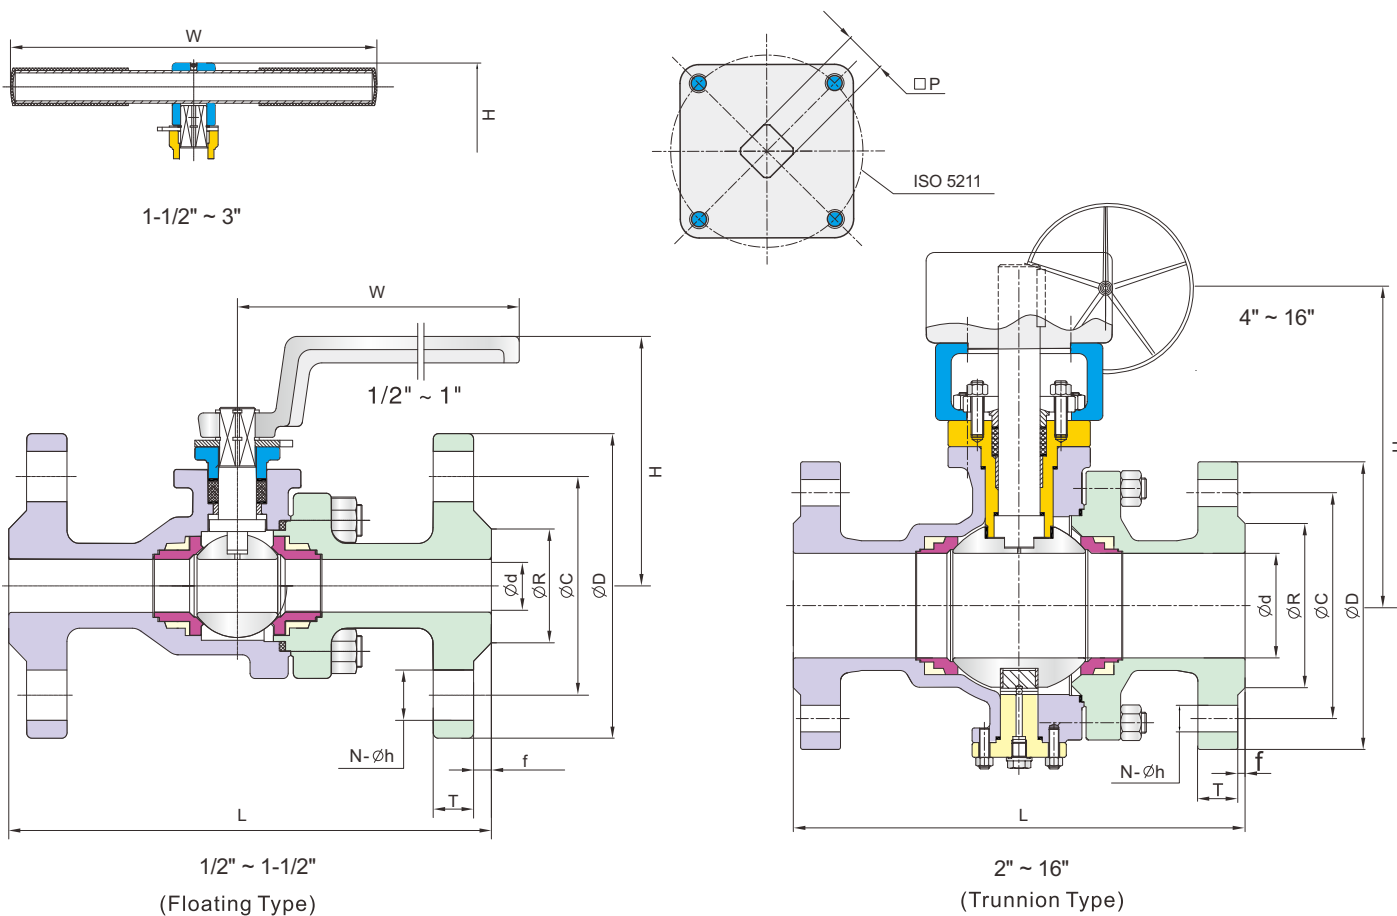

ASME CLASS 600

KV-M43, KV-M63

Unit: mm

Size	Ød	L	ØR	ØC	ØD	f	T	N	Øh	H	W	P	ISO 5211 on Valve
1/2"	15	165	34.9	66.7	95.0	7	14.3	4	16.0	91	160	11	F05
3/4"	20	190	42.9	82.6	115.0	7	15.9	4	19.0	96	160	11	F05
1"	25	216	50.8	88.9	125.0	7	17.5	4	19.0	105	200	14	F07
1-1/2"	38	241	73.0	114.3	155.0	7	22.3	4	22.3	155	300	17	F10
2"	50	292	92.1	127.0	165.0	7	25.4	8	19.0	178	400	22	F10
2-1/2"	65	330	104.8	149.2	190.0	7	28.6	8	22.3	230	800	27	F14
3"	76	356	127.0	168.3	210.0	7	31.8	8	22.3	225	800	27	F14
4"	100	432	157.2	216.0	275.0	7	38.1	8	25.4	300	—	34	F14
6"	150	559	215.9	292.1	355.0	7	47.7	12	29.0	461	—	46	F16
8"	200	660	269.9	349.2	420.0	7	55.6	12	32.0	515	—	55	F25
10"	252	787	323.8	431.8	510.0	7	63.5	16	35.0	580	—	60	F25
12"	303	838	381.0	489.0	560.0	7	66.7	20	35.0	770	—	—	F27
14"	337	889	412.8	527.0	605.0	7	69.9	20	39.0	870	—	—	F32
16"	387	991	469.9	603.2	685.0	7	76.2	20	42.0	1020	—	—	F35

ASME CLASS 900

KV-M45, KV-M65

Unit: mm

Size	Ød	L	ØR	ØC	ØD	f	T	N	Øh	H	W	P	ISO 5211 on Valve
1/2"	15	216	34.9	82.6	120	7	22.3	4	23.0	110.0	160	11	F05
3/4"	20	229	42.9	88.9	130	7	25.4	4	23.0	101.0	160	11	F05
1"	25	254	50.8	101.6	150	7	28.6	4	25.5	109.8	200	14	F07
1-1/2"	38	305	73.0	123.8	180	7	31.8	4	29.0	184.6	300	17	F10
2"	49	368	92.1	165.0	215	7	38.1	8	26.0	184.6	400	27	F10
2-1/2"	65	419	104.8	190.5	245	7	41.3	8	26.0	263.0	800	27	F14
3"	75	381	127.0	190.5	240	7	38.1	8	25.4	263.0	800	30	F14
4"	100	457	157.2	235.0	290	7	44.5	8	32.5	350.0	—	34	F14
6"	150	610	215.9	317.5	380	7	55.6	12	32.5	475.0	—	46	F16
8"	200	737	269.9	393.5	470	7	63.5	12	39.0	563.0	—	55	F25
10"	252	838	323.8	469.9	545	7	69.9	16	38.1	627.0	—	60	F25
12"	303	965	381.0	533.4	610	7	79.4	20	39.0	770.0	—	—	F32
14"	322	1029	412.8	558.8	640	7	85.8	20	41.3	870.0	—	—	F32
16"	373	1130	469.9	616.0	705	7	88.9	20	44.5	1020.0	—	—	F35